


REV	DESCRIPTION	DATE	DRAWN	APPROVED
A	ECO-0005585	2020/10/26	LRC	SEVEN



NOTE:




1. MATERIAL:
HOUSING: PLASTIC ,UL94V-0, BLACK
CAP: PLASTIC ,UL94V-0, BLACK
CONTACT: COPPER ALLOY
2. CURRENT RATING: AC/DC 2A
3. WITHSTANDING VOLTAGE: AC 500V MINUTE
4. INSULATION RESISTANCE: 1000MΩ MIN
5. CONTACT RESISTANCE: 30mΩ MAX
6. OPERATING TEMPERATURE RANGE: -55°C~105°C
7. PART NUMBER:

BF07-304-103E



10=10PIN

PACKING
3=T&R

PLATING OF OPTION
E: GOLD 15u" ON CONTACT AREA,
GOLD FLASH ON SOLDER TAIL.

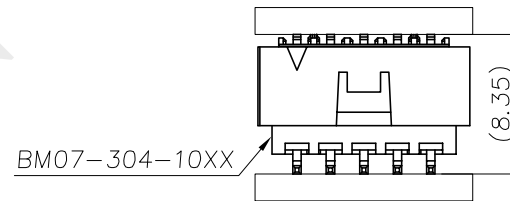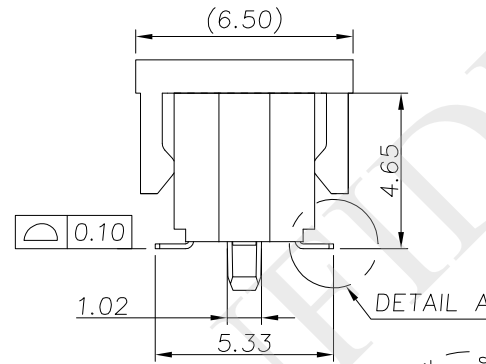

MATEING VIEW
SCALE 1:2

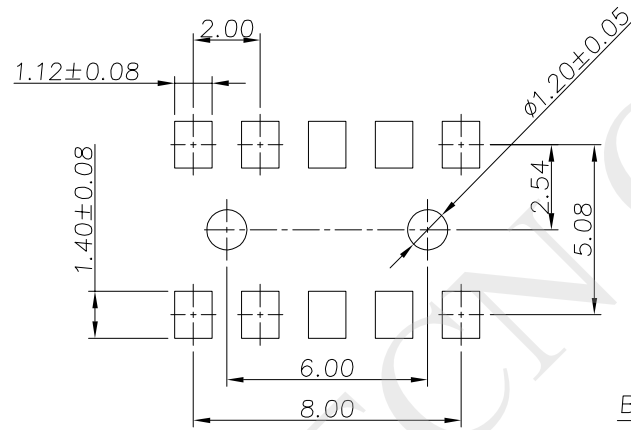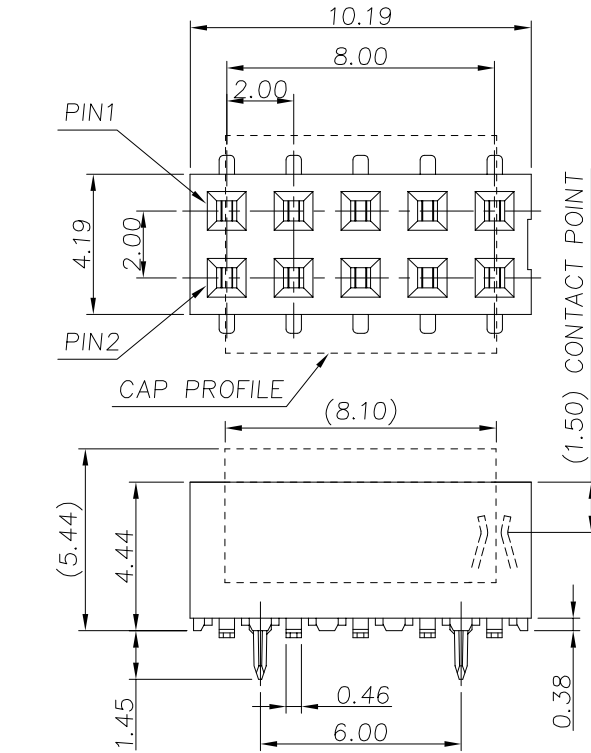

P.C.B LAYOUT
GENERAL TOLERANCE ±0.05

FCN THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FCN GROUP AND SHALL NOT BE PRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FCN GROUP.		TOLERANCES : DECIMALS.X ± 0.38 ANGULAR X ± .XX ± 0.25 .X ± .XXX ± .XX ±		UNLESS OTHERWISE SPECIFIED; DIMENSIONS ARE IN MILLIMETER. DO NOT SCALE DRAWING.	
		NAME BTB FEMALE P=2.0mm 180D SMT CONN.			
DRAWN LRC	DATE 2020/10/26	FILE NO. BF07-304		DWG NO. D08-00772	REV A
CHECKED SEVEN	DATE 2020/10/26	CAD NO. D08-00772_1 A		 SHEET 1 OF 2	
APVD SEVEN	DATE 2020/10/26				

